



Demonstration



**Vertical milling indexable inserts and toolholders to perform a wide variety of threads, grooves, chamfers and more.**

## Advantages of CMT - Vertical Milling

- Ground profile inserts for high precision and excellent performance.
- Working at high machining parameters, with high surface quality.
- Solid and accurate clamping method enables full repeatability.
- Same insert for right-hand or left-hand threads.
- Toolholders include weldon shank and coolant bore.
- Chamfer inserts are also available.

Contents:	Page:	Contents:	Page:
<b>Introduction: CMT Vertical Milling</b>	2	Corner Rounding	20
Product Identification	3-4	Front and Back Corner Rounding	21
<b>Inserts</b>	5-21	<b>Toolholders</b>	22-23
Partial Profile 60° - ISO, UN	5-6	Steel Toolholders	22
Partial Profile 60° - NPT	6	Carbide Shank Toolholders	23
Partial Profile 55° - BSP(G), BSF, BSW	7	<b>Modular holders</b>	<b>24-25</b>
Full Profile - ISO	8-9	<b>CMT Multi Insert Milling Cutters</b>	26
Full Profile - UN	10-11	Product Identification	27
G 55° BSW, BSF, BSP	12	Groove Milling	28-29
Trapez - DIN 103	12	Chamfering	29
Acme	13	Partial Profile 60° - ISO, UN	30
Round - DIN 405	13	<b>Toolholders</b>	31-32
Chamfering and Grooving	14	Milling Cutter - Arbor	31
Chamfering, Grooving and Boring	14	Milling Cutter - Shell Mill	31
Dovetail 45°	15	Milling Cutter - Weldon Shank	32
Groove Milling	15-19	Milling Cutter - Disc Milling	32
Face Milling and Finishing	19		

# CMT Vertical Milling


## Advantages

- Ground profile inserts for high precision and excellent performance.
- Working at high machining parameters, with high surface quality.
- Solid and accurate clamping method enables full repeatability.
- Same insert and holder for right-hand or left-hand threads.
- Toolholders include weldon shank and coolant bore.

## CMT Straight Flute Inserts

### Carbide Grade: MT7

Inserts are available in MT7 Sub-Micron Grade with Titanium Aluminum Nitride multi-layer coating (ISO K10 - K20). This is a general purpose grade, covering a very wide range of materials.




## CMT Spiral Multi Flute Inserts

- Multi flute: 4-8 cutting edges
- Spiral flute for smooth cutting

The new cutters are designed for large range of materials including hardened steel up to 62 HRc.

### Advantages



- Longer tool life
- High material removal and higher feeds results increased productivity
- Excellent surface finish
- Reduced cycle time
- Low cutting forces due to the spiral multi flutes





### Carbide Grade: MT8

Sub Micron grade with advanced PVD triple coating (ISO K10-K20). Extremely high heat resistant and smooth cutting operation, high performance, for all machining conditions.


## Product Identification - Ordering Codes

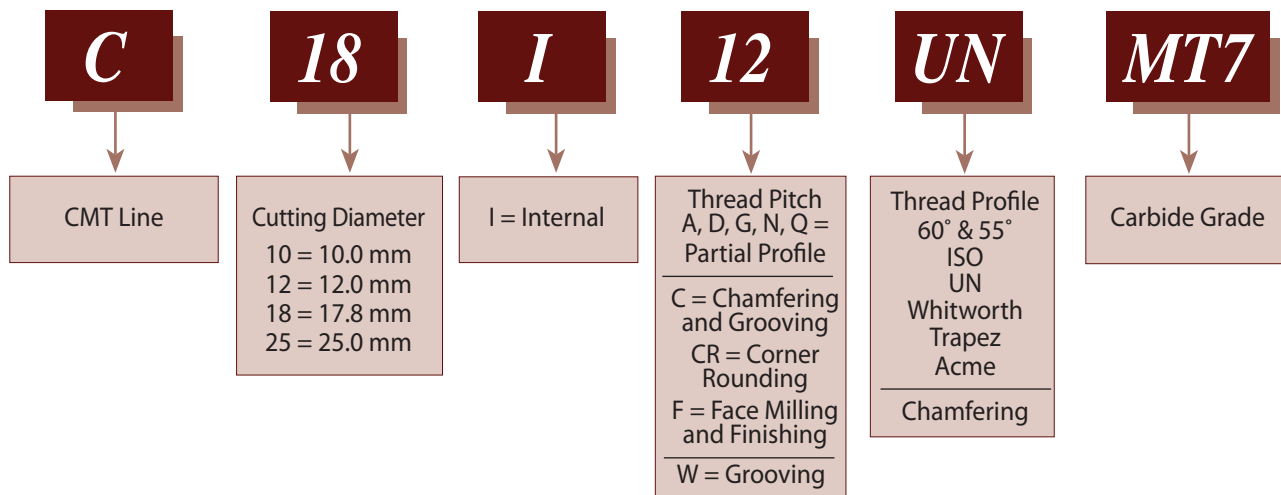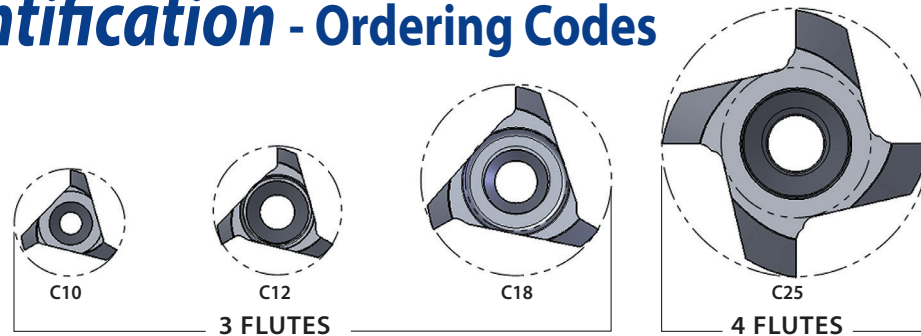

## CMT Spiral Multi Flute Inserts

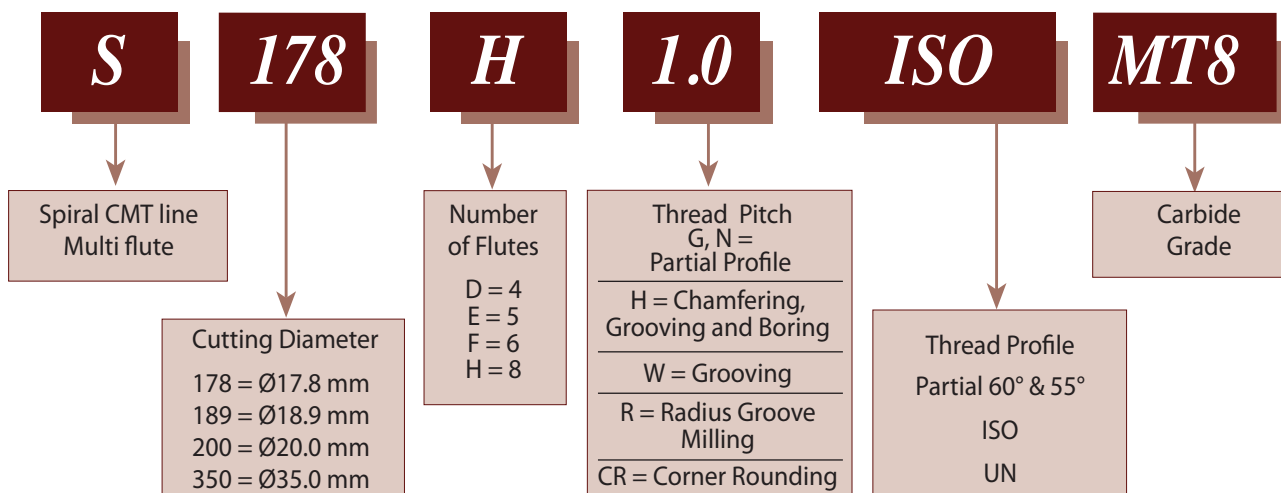


## Product Identification - Ordering Codes CMT Toolholders

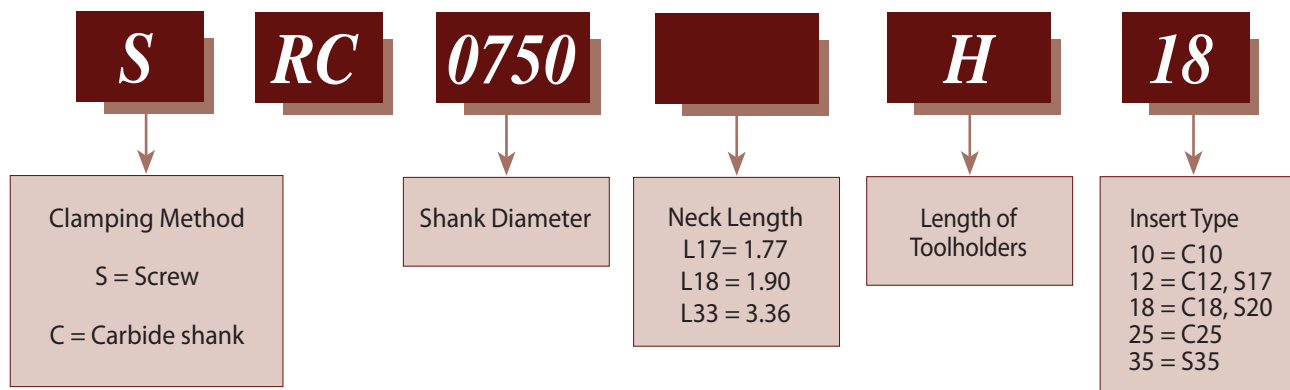

# CMT Vertical Milling

## Partial Profile 60° - ISO, UN

Same insert for internal and external thread

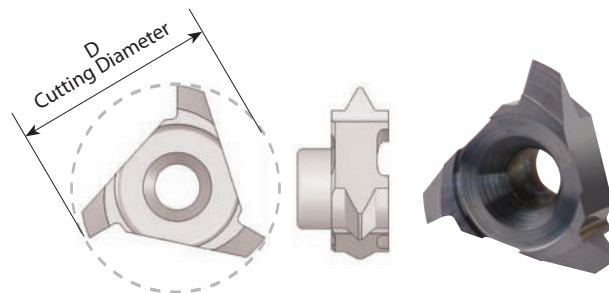

Insert Type	Ordering Code	Pitch Range mm	Pitch Range TPI	D	Thread Dia. (min)		Holder Code*
					Pitch Low Range	Pitch High Range	
C10	<b>C10 A60</b>	Int. 0.5 - 0.8	56 - 28	.39	Ø ≥ .43	Ø ≥ .47	H1, 1.1, 2, 15, 16, 17
		Ex. 0.4 - 0.8	64 - 32				
	<b>C10 G60</b>	Int. 1.0 - 2.0	28 - 13	.39	Ø ≥ .47	Ø ≥ .55	
		Ex. 0.8 - 1.75	32 - 15				
C12	<b>C12 A60</b>	Int. 0.5 - 0.8	56 - 28	.47	Ø ≥ .51	Ø ≥ .55	H3, 3.1, 4, 5, 18, 19, 20
		Ex. 0.4 - 0.8	64 - 32				
	<b>C12 G60</b>	Int. 1.0 - 2.0	28 - 13	.49	Ø ≥ .55	Ø ≥ .63	
		Ex. 0.8 - 1.75	32 - 15				
	<b>C12 AG60</b>	Int. 1.5 - 2.5	18 - 11	.49	Ø ≥ .59	Ø ≥ .67	
		Ex. 1.25 - 2.0	24 - 13				
C18	<b>C18 A60</b>	Int. 0.5 - 0.8	56 - 28	.70	Ø ≥ .75	Ø ≥ .75	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
		Ex. 0.4 - 0.8	64 - 32				
	<b>C18 G60</b>	Int. 1.0 - 1.75	28 - 14	.70	Ø ≥ .79	Ø ≥ .83	
		Ex. 0.8 - 1.5	32 - 16				
	<b>C18 D60</b>	Int. 2.0 - 3.0	13 - 8	.70	Ø ≥ .83	Ø ≥ .91	
		Ex. 1.75 - 2.5	15 - 10				
C25	<b>C25 G60</b>	Int. 1.5 - 2.5	16 - 10	.98	Ø ≥ 1.10	Ø ≥ 1.18	H10, 11, 24, 25, 31
		Ex. 1.0 - 2.0	28 - 13				
	<b>C25 N60</b>	Int. 3.0 - 5.0	8 - 5	.98	Ø ≥ 1.18	Ø ≥ 1.34	
		Ex. 2.5 - 4.5	10 - 6				
	<b>C25 Q60</b>	Int. 5.0 - 6.0	5 - 4	.98	Ø ≥ 1.34	Ø ≥ 1.42	H10, 11, 24, 25
		Ex. 4.5 - 5.0	6 - 5				

Order example: C18 D60 MT7


\* For complete toolholder description see pages B07-22 and 23

**B07-5**

## Partial Profile 60° - ISO, UN

Same insert for internal and external thread

Multi Flute

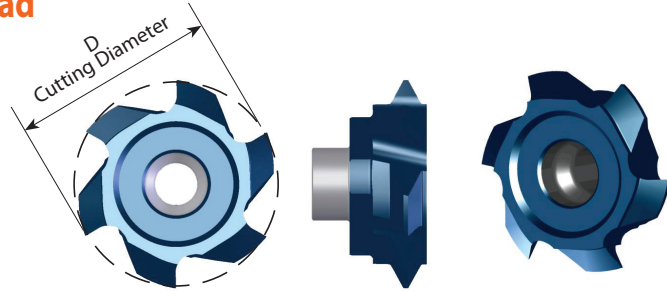


Insert Type	Ordering Code	Pitch Range mm	Pitch Range TPI	D	No. of Flutes	Thread Dia (min)		Holder Code*
						Pitch Low range	Pitch High range	
S17	<b>S160 F AG60</b>	Int. 1.0-3.5	28 - 7	.63	6	Ø ≥ .71	Ø ≥ .87	H3, 3.1, 4, 5, 18, 19, 20
		Ex. 0.8-3.0	32 - 8.5					
S20	<b>S200 F G60</b>	Int. 1.5-2.5	16 - 10	.79	6	Ø ≥ .91	Ø ≥ .98	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
		Ex. 1.0-2.0	28 - 13					
S20	<b>S200 D N60</b>	Int. 3.0-5.0	8 - 5	.79	4	Ø ≥ .98	Ø ≥ 1.14	H5.1, 5.2, 20.1, 21
		Ex. 2.5-4.5	10 - 6					
S35	<b>S350 F N60</b>	Int. 3.0-5.0	8 - 5	1.38	6	Ø ≥ 1.57	Ø ≥ 1.73	H12, 13, 14, 26, 32
		Ex. 2.5-4.5	10 - 6					
S35	<b>S350 F Q60</b>	Int. 5.0-6.0	5 - 4	1.38	6	Ø ≥ 1.73	Ø ≥ 1.81	H12, 13, 14, 26, 32
		Ex. 4.5-5.0	6 - 5					

Order example: S200 D N60 MT8

## Partial Profile 60° - NPT

Same insert for internal and external thread

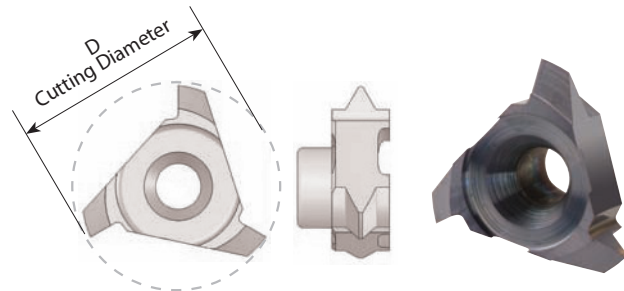

Insert Type	Ordering Code	Pitch TPI	Standard	D	Holder Code*
C10	<b>C10 18 NPT</b>	18	1/4 - 3/8	.39	H1, 1.1, 2, 15, 17
C18	<b>C18 14 NPT</b>	14	1/2 - 3/4	.62	H5.1, 5.2, 20.1, 21
C25	<b>C25 11.5NPT</b>	11.5	1-2	.98	H10, 11, 24, 25, 31
	<b>C25 8 NPT</b>	8	≥ 2 1/2	.98	

\* For complete toolholder description see pages B07-22 and 23


**B07-6**



# CMT Vertical Milling

## Partial Profile 55° - BSP(G), BSF, BSW

Same insert for internal and external thread

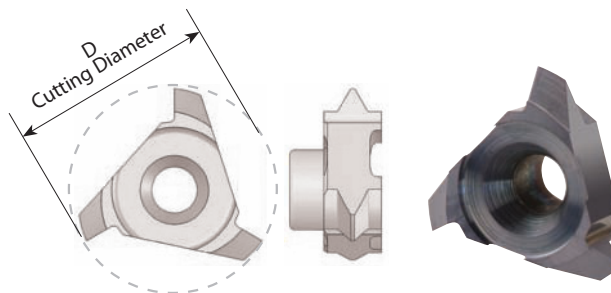

Insert Type	Ordering Code	Pitch Range TPI	D	Thread Dia. (min)	Holder Code*
C10	<b>C10 G55</b>	19 - 14	.39	$\varnothing \geq .51$	H1, 2, 15,17
C12	<b>C12 G55</b>	28 - 19	.47	$\varnothing \geq .55$	H3, 4, 5, 18, 19, 20
	<b>C12 N55</b>	14 - 11	.48	$\varnothing \geq .63$	H3, 4, 5, 18, 20
C18	<b>C18 G55</b>	14 - 8	.71	$\varnothing \geq .91$	H5.1, 5.2, 20.1, 21
C25	<b>C25 N55</b>	7 - 5	.98	$\varnothing \geq 1.34$	H10, 11, 24, 25


Order example: C18 G55 MT7



## Partial Profile 55° - BSP(G), BSF, BSW

Same insert for internal and external thread

Multi Flute

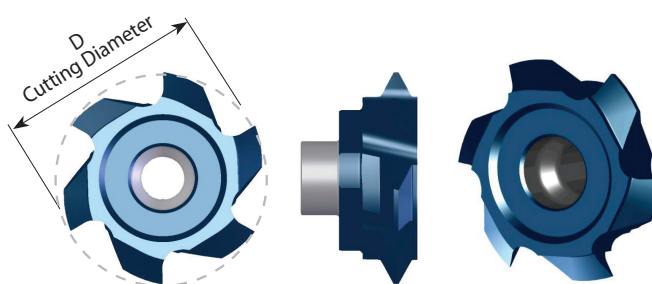

Insert Type	Ordering Code	Pitch Range TPI	D	No. of Flutes	Thread Dia. (min)	Holder Code*
S17	<b>S170 F G55</b>	11-8	.67	6	$\varnothing \geq .83$	H3, 3.1, 4, 5, 18, 19, 20
S20	<b>S195 F G55</b>	14	.77	6	$\varnothing \geq .91$	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>S200 D N55</b>	8-6	.79	4	$\varnothing \geq .98$	


Order example: S200 D N55 MT8

\* For complete toolholder description see pages B07-22 and 23

**B07-7**

## Full Profile - ISO

Inserts for internal thread

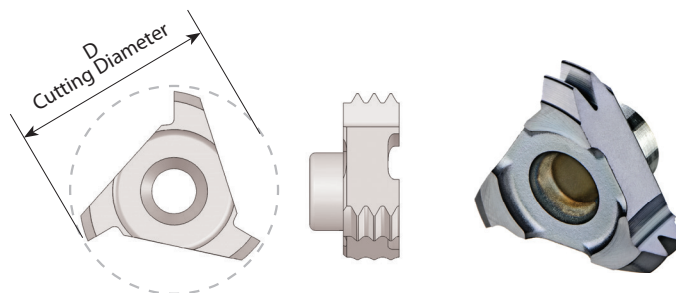

Insert Type	Ordering Code	Pitch mm	M coarse	M fine	Number of Teeth	D	Holder Code*
C10	<b>C10 I 0.5 ISO</b>	0.5		M10, M12	6	.35	H1, 1.1, 2, 15, 16, 17
	<b>C10 I 0.75 ISO</b>	0.75		M12	4	.39	
	<b>C10 I 1.0 ISO</b>	1.0		M12, M13	3	.39	
	<b>C10 I 1.5 ISO</b>	1.5		M13, M14	2	.39	
	<b>C10 I 1.75 ISO</b>	1.75	M12		1	.38	H1, 2, 15, 17
	<b>C10 I 2.0 ISO</b>	2.0	M14	M18	1	.39	
C12	<b>C12 I 0.5 ISO</b>	0.5		M13-M18	6	.47	H3, 3.1, 4, 5, 18, 19, 20
	<b>C12 I 0.75 ISO</b>	0.75		M13-M18	4	.47	
	<b>C12 I 1.0 ISO</b>	1.0		M14-M19	3	.47	
	<b>C12 I 1.5 ISO</b>	1.5		M15-M19	2	.47	
	<b>C12 I 2.0 ISO</b>	2.0	M16	M18, M20	1	.49	H3, 4, 5, 18, 20
	<b>C12 I 2.5 ISO</b>	2.5	M18, M20		1	.47	
C18	<b>C18 I 0.5 ISO</b>	0.5		M19-M60	9	.70	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>C18 I 0.75 ISO</b>	0.75		M19-M60	6	.70	
	<b>C18 I 1.0 ISO</b>	1.0		M20-M60	5	.70	
	<b>C18 I 1.25 ISO</b>	1.25			4	.70	
	<b>C18 I 1.5 ISO</b>	1.5		M20-M60	3	.70	
	<b>C18 I 2.0 ISO</b>	2.0		M21-M60	2	.70	
	<b>C18 I 2.5 ISO</b>	2.5	M22		2	.70	
	<b>C18 I 3.0 ISO</b>	3.0	M24, M27	M28-M60	1	.70	
<b>C18 I 3.5 ISO</b>	3.5	M30, M33		1	.70		
C25	<b>C25 I 3.0 ISO</b>	3.0	M32, M33	M30-M80	2	.98	H10, 11, 24, 25, 31
	<b>C25 I 3.5 ISO</b>	3.5	M33		1	.98	
	<b>C25 I 4.0 ISO</b>	4.0	M36, M39	M48-M80	1	.98	
	<b>C25 I 4.5 ISO</b>	4.5	M42, M45		1	.98	
	<b>C25 I 5.0 ISO</b>	5.0	M48, M52		1	.98	
	<b>C25 I 5.5 ISO</b>	5.5	M56, M60		1	.98	
	<b>C25 I 6.0 ISO</b>	6.0	M64, M68	M70-M80	1	.98	

\* For complete toolholder description see pages B07-22 and 23

**B07-8**




# CMT Vertical Milling

## Full Profile - ISO

Inserts for internal thread

Multi Flute

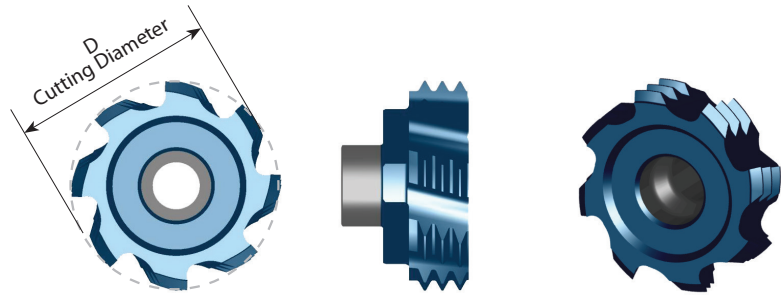


Insert Type	Ordering Code	Pitch mm	M coarse	M fine	Number of Teeth	D	No. of Flutes	Holder Code*
S17	<b>S166 F 2.0 ISO</b>	2.0		M20-M30	1	.65	6	H3, 3.1, 4, 5, 18, 19, 20
	<b>S160 F 2.5 ISO</b>	2.5	M20		1	.63	6	
S20	<b>S163 H 1.0 ISO</b>	1.0		M18-M60	5	.64	8	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>S175 H 1.5 ISO</b>	1.5		M20-M60	3	.69	8	
	<b>S186 F 2.0 ISO</b>	2.0		M22-M60	2	.73	6	
	<b>S178 F 2.5 ISO</b>	2.5	M22		2	.70	6	
	<b>S189 F 3.0 ISO</b>	3.0	M24, M27	M28-M60	1	.74	6	
	<b>S200 F 3.5 ISO</b>	3.5	M30, M33		1	.79	6	
	<b>S200 F 4.0 ISO</b>	4.0	M36, M39	M40-M60	1	.79	6	
	<b>S200 E 4.5 ISO</b>	4.5	M42		1	.79	5	
	<b>S200 D 5.0 ISO</b>	5.0	M48, M52		1	.79	4	
S35	<b>S350 F 4.5 ISO</b>	4.5	M45	M54	1	1.38	6	H12, 13, 14, 26, 32
	<b>S350 F 6.0 ISO</b>	6.0	M64, M68		1	1.38	6	
	<b>S350 F 8.0 ISO</b>	8.0		M130-M200	1	1.38	6	

Order example: S350 F 6.0 ISO MT8

\* For complete toolholder description see pages B07-22 and 23

## Full Profile - UN

Inserts for internal thread

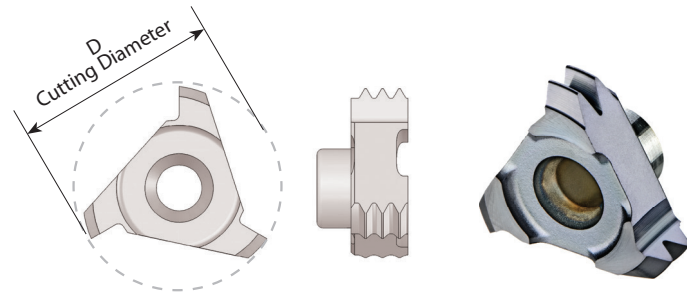

Insert Type	Ordering Code	Pitch TPI	Nominal Size	UNC	UNF	UNEF	Number of Teeth	D	Holder Code*
C10	<b>C10 I 20 UN</b>	20			1/2		2	.39	H1, 1.1, 2, 15, 16, 17
	<b>C10 I 18 UN</b>	18			9/16		2	.39	
	<b>C10 I 13 UN</b>	13		1/2			1	.39	H1, 2, 15, 17
	<b>C10 I 12 UN</b>	12	5/8, 11/16, 3/4	9/16			1	.39	
C12	<b>C12 I 32 UN</b>	32	9/16, 5/8				3	.47	H3, 3.1, 4, 5, 18, 19, 20
	<b>C12 I 28 UN</b>	28	9/16, 5/8, 11/16				3	.47	
	<b>C12 I 24 UN</b>	24				9/16, 5/8, 11/16	2	.47	
	<b>C12 I 20 UN</b>	20	9/16, 5/8, 11/16			3/4	2	.47	
	<b>C12 I 18 UN</b>	18			5/8		2	.47	
	<b>C12 I 16 UN</b>	16	5/8, 11/16		3/4		1	.47	
	<b>C12 I 12 UN</b>	12	5/8				1	.49	H3, 4, 5, 18, 20
	<b>C12 I 11 UN</b>	11		5/8			1	.47	
C18	<b>C18 I 32 UN</b>	32	3/4, 13/16, 7/8				6	.70	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>C18 I 28 UN</b>	28	3/4, 13/16, 7/8				5	.70	
	<b>C18 I 24 UN</b>	24					4	.70	
	<b>C18 I 20 UN</b>	20	11/16, 11/8			13/16, 7/8, 15/16	3	.70	
	<b>C18 I 18 UN</b>	18					3	.70	
	<b>C18 I 16 UN</b>	16	7/8, 1				3	.70	
	<b>C18 I 14 UN</b>	14			7/8		2	.70	
	<b>C18 I 12 UN</b>	12	7/8		1, 1 1/8		2	.70	
	<b>C18 I 11 UN</b>	11					2	.70	
	<b>C18 I 9 UN</b>	9		7/8			1	.70	
C25	<b>C25 I 8 UN</b>	8	1 3/16, 1 1/4, 1 5/16				2	.98	H10, 11, 24, 25, 31
	<b>C25 I 7 UN</b>	7		1 1/4			1	.98	
	<b>C25 I 6 UN</b>	6	17/16, 19/16	1 3/8, 1 1/2			1	.98	
	<b>C25 I 5 UN</b>	5		1 3/4			1	.98	
	<b>C25 I 4 UN</b>	4		2 1/2, 2 3/4			1	.98	H10, 11, 24, 25

\* For complete toolholder description see pages B07-22 and 23


**B07-10**

# CMT Vertical Milling

## Full Profile - UN

Inserts for internal thread

Multi Flute

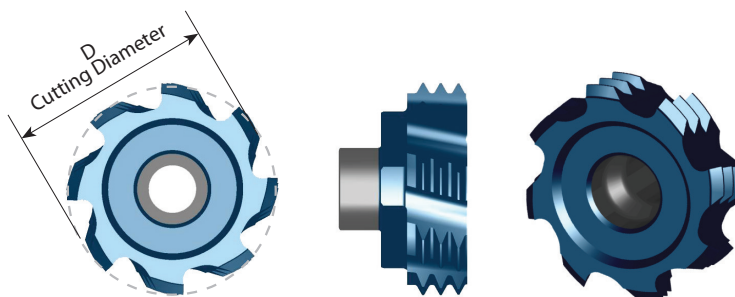


Insert Type	Ordering Code	Pitch TPI	Nominal size	UNC	UNF	UNEF	Number of Teeth	D	No. of Flutes	Holder Code*
S17	<b>S150 F 10 UN</b>	10		3/4			1	.59	6	H3, 3.1, 4, 5, 18, 19, 20
	<b>S160 H 24 UN</b>	24				11/16	4	.63	8	
S20	<b>S169 H 20 UN</b>	20				3/4, 13/16, 7/8, 15/16, 1	4	.67	8	
	<b>S164 F 16 UN</b>	16	7/8, 15/16, 1		3/4		3	.65	6	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>S191 F 14 UN</b>	14			7/8		2	.75	6	
	<b>S186 F 12 UN</b>	12	7/8, 15/16		1		2	.73	6	
	<b>S178 F 9 UN</b>	9		7/8			1	.70	6	
	<b>S200 F 8 UN</b>	8	1 1/8	1			1	.79	6	
	<b>S200 F 7 UN</b>	7		1 1/8, 1 1/4			1	.79	6	
	<b>S200 E 6 UN</b>	6	1 7/16	1 3/8, 1 1/2			1	.79	5	
<b>S200 D 5 UN</b>	5		1 3/4			1	.79	4		
S35	<b>S350 F 8 UN</b>	8	1 5/8, 1 3/4				2	1.38	6	H12, 13, 14, 26, 32
	<b>S350 F 4 UN</b>	4		2 1/2, 2 3/4, 3			1	1.38	6	

Order example: S200 F 8 UN MT8

\* For complete toolholder description see pages B07-22 and 23

## G 55° BSW, BSF, BSP


Same insert for internal and external thread

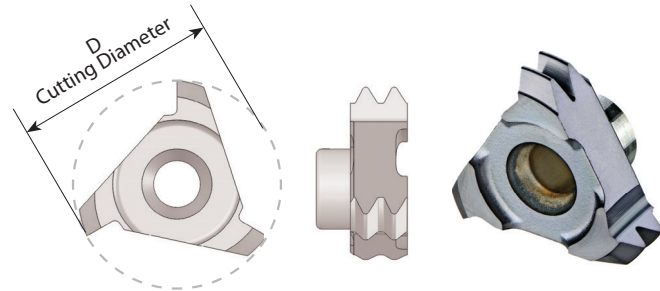

Insert Type	Ordering Code	Pitch TPI	Standard	Number of Teeth	D	Holder Code*
C10	<b>C10 19 W</b>	19	G 1/4	2	.39	H1, 1.1, 2, 15, 16, 17
C12	<b>C12 19 W</b>	19	G 3/8	2	.47	H3, 3.1, 4, 5, 18, 19, 20
C18	<b>C18 14 W</b>	14	G 1/2 - 7/8	2	.70	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>C18 11 W</b>	11	G ≥ 1	2	.70	
C25	<b>C25 11 W</b>	11	G ≥ 1	2	.98	H10, 11, 24, 25, 31

## Trapez - DIN 103

Inserts for internal thread

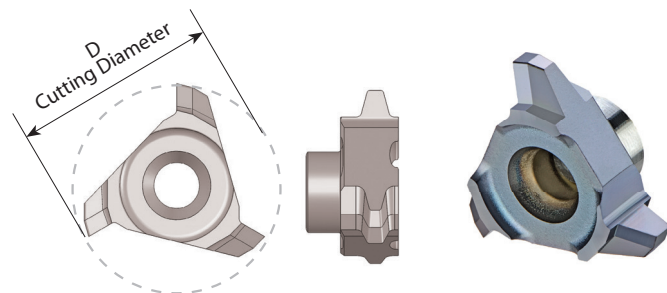


Insert Type	Ordering Code	Pitch mm	Standard	D	Holder Code*
C10	<b>C10 I 2 TR</b>	2.0	Tr16x2, Tr18x2	.39	H1, 2, 15, 17
C12	<b>C12 I 2 TR</b>	2.0	Tr20x2	.47	H3, 4, 5, 18, 20
C18	<b>C18 I 3 TR</b>	3.0	Tr24x3, Tr26x3	.70	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>C18 I 4 TR</b>	4.0	Tr26x4	.70	
	<b>C18 I 5 TR</b>	5.0	Tr28x5	.70	
C25	<b>C25 I 6 TR</b>	6.0	Tr36x6	.98	H10, 11, 24, 25

\* For complete toolholder description see pages B07-22 and 23

# CMT Vertical Milling

## Acme


Inserts for internal thread

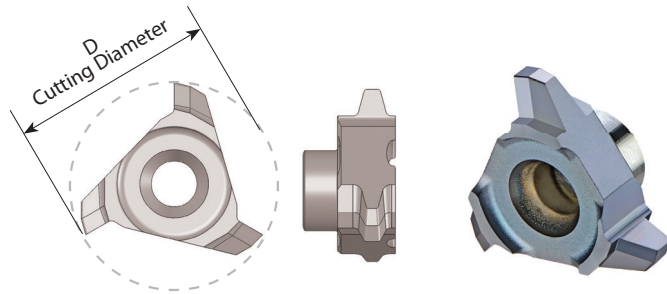

Insert Type	Ordering Code	Pitch TPI	Standard	D	Holder Code*
C18	<b>C18 I 5 ACME</b>	5	1 <sup>1</sup> / <sub>8</sub> , 1 <sup>1</sup> / <sub>4</sub>	.71	H5.1, 5.2, 20.1
C25	<b>C25 I 4 ACME</b>	4	1 <sup>1</sup> / <sub>2</sub> , 1 <sup>3</sup> / <sub>4</sub> , 2	.98	H10, 11, 24, 25

## Round-DIN 405


Inserts for internal thread

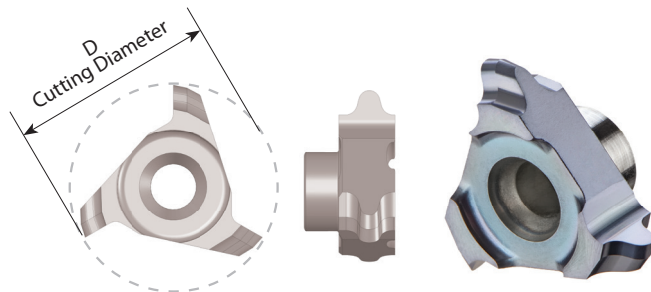

Insert Type	Ordering Code	Pitch TPI	Standard	D	Holder Code*
C18	<b>C18 1/8 RD</b>	8	1/8RD	.70	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>C18 1/6 RD</b>	6	1/6RD	.70	H5.1, 5.2, 20.1, 21
C25	<b>C25 1/4 RD</b>	4	1/4RD	.98	H10, 11, 24, 25, 31


\* For complete toolholder description see pages B07-22 and 23

## Chamfering and Grooving

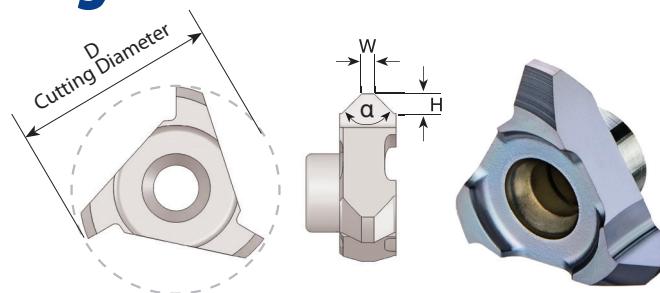

Insert Type	Ordering Code	D	H	W	α	Holder Code*
C10	<b>C10 C90</b>	.39	.051	.016	90°	H1, 2, 15, 17
C12	<b>C12 C90</b>	.47	.053	.012	90°	H3, 4, 5, 18, 20
C18	<b>C18 C90</b>	.70	.077	.043	90°	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
C25	<b>C25 C90</b>	.98	.098	.039	90°	H10, 11, 24, 25, 31

## Chamfering, Grooving and Boring Multi Flute

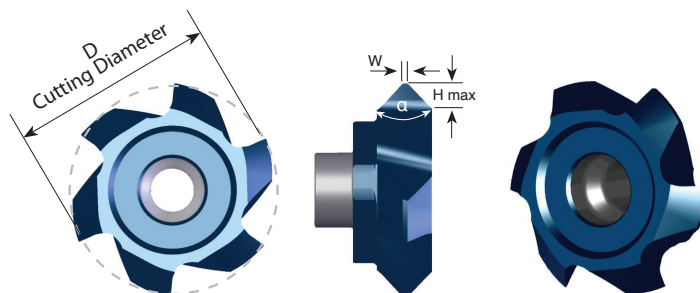

Insert Type	Ordering Code	D	H max	W	α	No. of Flutes	Holder Code*
S17	<b>SC160 E H14</b>	.63	.053	.008	90°	5	H3, 3.1, 4, 5, 18, 19, 20
S20	<b>SC170 E H14</b>	.67	.053	.008	90°	5	H6, 7, 8, 9, 21, 22, 23
	<b>SC200 F H14</b>	.79	.053	.008	90°	6	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>SC200 F H24</b>	.79	.093	.008	90°	6	
S35	<b>SC350 F H42</b>	1.38	.165	.008	90°	6	H12, 13, 14, 26, 32
S20	<b>SC200 F H20</b>	.79	.077	.039	90°	6	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>SC200 F H17</b>	.79	.067	.059	90°	6	
	<b>SC200 F H15</b>	.79	.059	.079	90°	6	
	<b>SC200 F H12</b>	.79	.047	.098	90°	6	


\* For complete toolholder description see pages B07-22 and 23



# CMT Vertical Milling




## Dovetail 45° Multi Flute

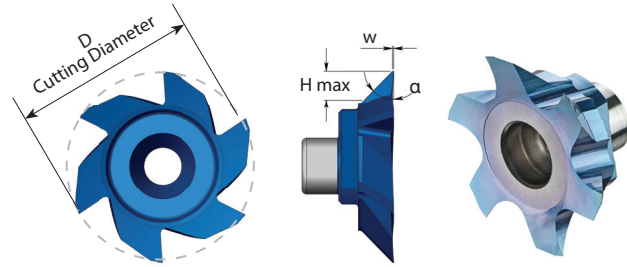

Insert Type	Ordering Code	D	H	W	α	No. of Flutes	Holder Code*
S17	<b>SC170 F A45</b>	.67	.10	.004	45°	6	H3, 3.1, 4, 5, 18, 19, 20
S20	<b>SC200 F A45</b>	.79	.12	.004	45°	6	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23

## Groove Milling

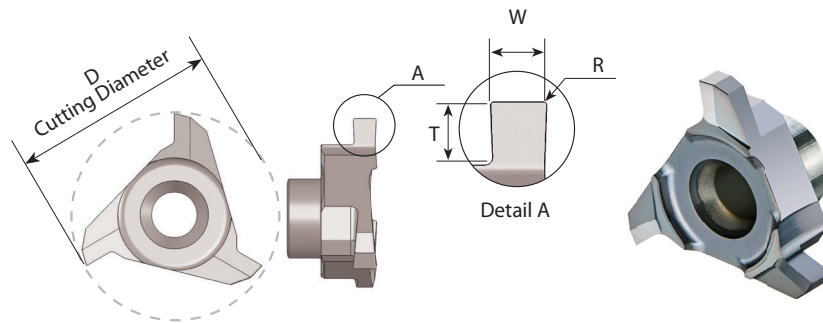


Insert Type	Ordering Code	D	W ±.001	T max.	R	Groove Dia. (min.)	Holder Code*
C10	<b>C10 W08</b>	.39	.031	.03	.004	∅ > .39	H1, 1.1, 2, 15, 16, 17
	<b>C10 W09</b>	.39	.035	.04	.004	∅ > .39	
	<b>C10 W10</b>	.39	.039	.04	.004	∅ > .39	
	<b>C10 W15</b>	.39	.059	.05	.004	∅ > .39	
	<b>C10 W20</b>	.39	.079	.05	.004	∅ > .39	
C12	<b>C12 W08</b>	.47	.031	.03	.004	∅ > .47	H3, 3.1, 4, 5, 18, 19, 20
	<b>C12 W10</b>	.47	.039	.04	.004	∅ > .47	
	<b>C12 W10T</b>	.48	.039	.06	.008	∅ > .48	H3, 4, 5, 18, 20
	<b>C12 W15</b>	.49	.059	.06	.004	∅ > .49	
	<b>C12 W20</b>	.49	.079	.06	.004	∅ > .49	
C18	<b>C18 W10</b>	.70	.039	.06	.004	∅ > .70	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>C18 W12</b>	.70	.047	.06	.004	∅ > .70	
	<b>C18 W15</b>	.70	.059	.08	.004	∅ > .70	
	<b>C18 W16</b>	.70	.063	.08	.004	∅ > .70	H5.1, 5.2, 20.1
C25	<b>C25 W20</b>	.98	.079	.12	.008	∅ > .98	H10, 11, 24, 25, 31
	<b>C25 W25</b>	.98	.098	.12	.008	∅ > .98	
	<b>C25 W30</b>	.98	.118	.12	.008	∅ > .98	
	<b>C25 W35</b>	.98	.138	.14	.008	∅ > .98	
	<b>C25 W40</b>	.98	.157	.14	.008	∅ > .98	
	<b>C25 W50</b>	.98	.197	.14	.008	∅ > .98	

\* For complete toolholder description see pages B07-22 and 23

**B07-15**

## Groove Milling

### DIN 471/472

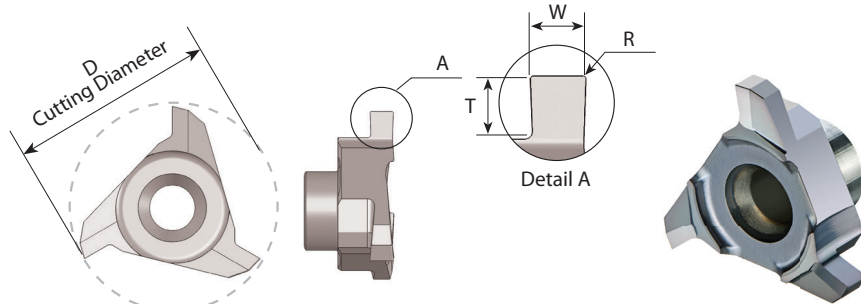


Insert Type	Ordering Code	D	Nom' groove width	W -.0016	T max.	R	Groove Dia. (min.)	Holder Code*
C10	<b>C10 W087</b>	.39	.031	.034	.051	0	Ø > .39	H1, 2, 15, 17
	<b>C10 W097</b>	.39	.035	.038	.051	0	Ø > .39	
	<b>C10 W121</b>	.39	.043	.048	.051	0	Ø > .39	
	<b>C10 W141</b>	.39	.051	.056	.051	.004	Ø > .39	
	<b>C10 W171</b>	.39	.063	.067	.051	.004	Ø > .39	
C12	<b>C12 W121</b>	.49	.043	.048	.067	0	Ø > .49	H3, 4, 5, 18, 20
	<b>C12 W141</b>	.49	.051	.056	.067	.004	Ø > .49	
	<b>C12 W171</b>	.49	.063	.067	.067	.004	Ø > .49	
C18	<b>C18 W121</b>	.70	.043	.048	.114	.004	Ø > .70	H5.1, 5.2, 20.1
	<b>C18 W141</b>	.70	.051	.056	.114	.004	Ø > .70	
	<b>C18 W171</b>	.70	.063	.067	.114	.004	Ø > .70	
	<b>C18 W196</b>	.70	.073	.077	.114	.006	Ø > .70	

Order example: C12 W141 MT7

\* For complete toolholder description see pages B07-22 and 23

# CMT Vertical Milling

## Groove Milling Multi Flute

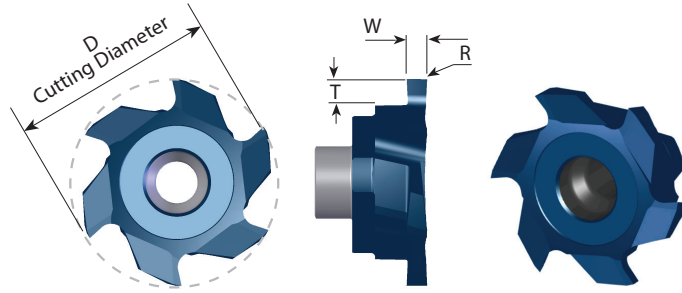


Insert Type	Ordering Code	D	W ±.001	T max.	R	Groove Dia. (min)	No. of Flutes	Holder Code*
S17	<b>SG170 F W15</b>	.67	.059	.11	.008	Ø > .67	6	H3, 3.1, 4, 5, 18, 19, 20
	<b>SG170 F W20</b>	.67	.079	.11	.008	Ø > .67	6	
	<b>SG170 F W25</b>	.67	.098	.11	.008	Ø > .67	6	
S20	<b>SG200 F W15</b>	.79	.059	.11	.008	Ø > .79	6	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>SG200 F W20</b>	.79	.079	.11	.008	Ø > .79	6	
	<b>SG200 F W25</b>	.79	.098	.11	.008	Ø > .79	6	
	<b>SG200 F W30</b>	.79	.118	.11	.008	Ø > .79	6	
	<b>SG200 F W40</b>	.79	.157	.11	.008	Ø > .79	6	
	<b>SG200 F W49</b>	.79	.193	.11	.008	Ø > .79	6	
S20	<b>SG200 E W20T</b>	.79	.079	.15	.008	Ø > .79	5	H5.1, 5.2, 20.1
	<b>SG200 E W25T</b>	.79	.098	.15	.008	Ø > .79	5	
	<b>SG200 E W30T</b>	.79	.118	.15	.008	Ø > .79	5	
S35	<b>SG350 F W30T</b>	1.38	.118	.26	.008	Ø > 1.38	6	H12, 13, 14, 26, 32
	<b>SG350 F W40T</b>	1.38	.157	.26	.008	Ø > 1.38	6	
	<b>SG350 F W50T</b>	1.38	.197	.26	.008	Ø > 1.38	6	
	<b>SG350 F W60T</b>	1.38	.236	.26	.008	Ø > 1.38	6	
	<b>SG350 F W80T</b>	1.38	.315	.26	.008	Ø > 1.38	6	

\* For complete toolholder description see pages B07-22 and 23

## Groove Milling


### Multi Flute

### DIN 471/472

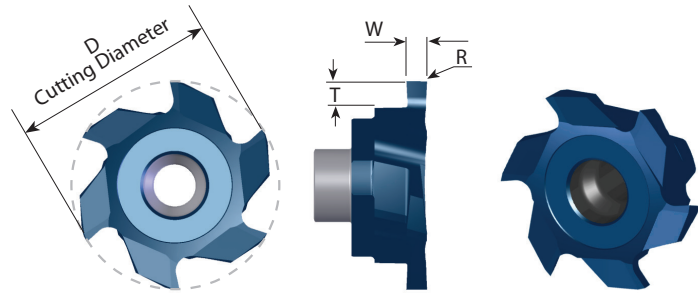

Insert Type	Ordering Code	D	Nom` groove width	W -.0016	T Max.	R	Groove Dia. (min)	No. of Flutes	Holder Code*
S20	<b>SG200 F W121</b>	.79	.043	.048	.16	0	Ø > .79	6	H5.1, 5.2, 20.1
	<b>SG200 F W141</b>	.79	.051	.055	.16	.004	Ø > .79	6	
	<b>SG200 F W171</b>	.79	.063	.067	.16	.004	Ø > .79	6	
	<b>SG200 F W196</b>	.79	.073	.077	.16	.004	Ø > .79	6	


## Full Radius Groove Milling

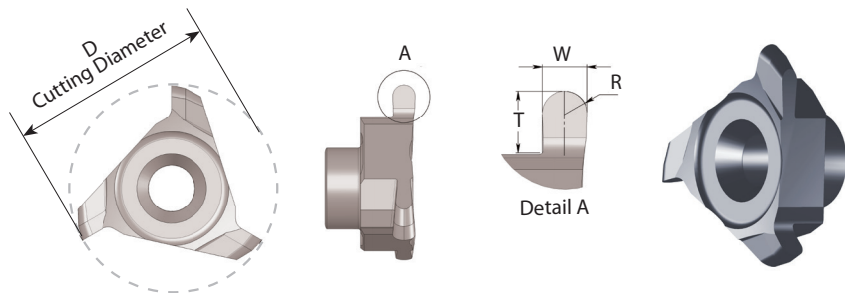

Insert Type	Ordering Code	D	R	W ±.001	T max.	Groove Dia. (min)	Holder Code*
C12	<b>C12 R11</b>	.49	.043	.087	.07	Ø > .49	H3, 4, 5, 18, 20
C18	<b>C18 R08</b>	.70	.031	.063	.11	Ø > .70	H5.1, 5.2, 20.1
	<b>C18 R11</b>	.70	.043	.087	.11	Ø > .70	

\* For complete toolholder description see pages B07-22 and 23


## Full Radius Groove Milling Multi Flute

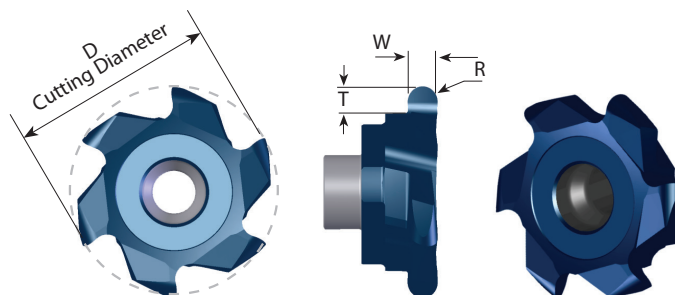

Insert Type	Ordering Code	D	R	W ± .001	T Max.	Groove Dia. (min)	No. of Flutes	Holder Code*
S20	<b>SG200 F R10</b>	.79	.039	.079	.11	Ø > .79	6	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>SG200 F R12</b>	.79	.047	.094	.11	Ø > .79	6	
	<b>SG200 F R15</b>	.79	.059	.118	.11	Ø > .79	6	
	<b>SG200 F R20</b>	.79	.079	.157	.11	Ø > .79	6	

Order example: SG200 F R15 MT8


## Face Milling and Finishing

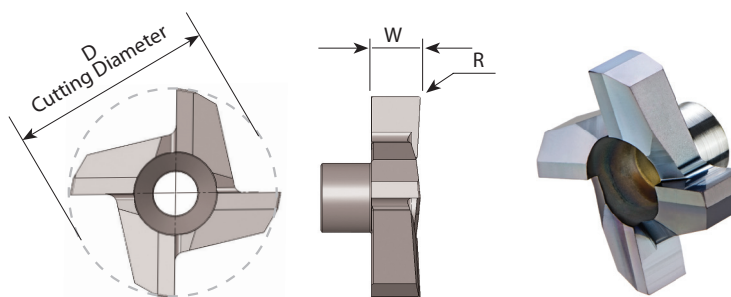

Insert Type	Ordering Code	D	W ±.004	R	Holder Code*
C10	<b>C10 F R0.1</b>	.39	.12	.004	H1, 1.1, 2, 15, 16, 17
C12	<b>C12 F R0.1</b>	.47	.12	.004	H3, 3.1, 4, 5, 18, 19, 20
C18	<b>C18 F R0.1</b>	.70	.20	.004	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
C25	<b>C25 F R0.2</b>	.98	.24	.008	H10, 11, 24, 25, 31


\* For complete toolholder description see pages B07-22 and 23

## Corner Rounding

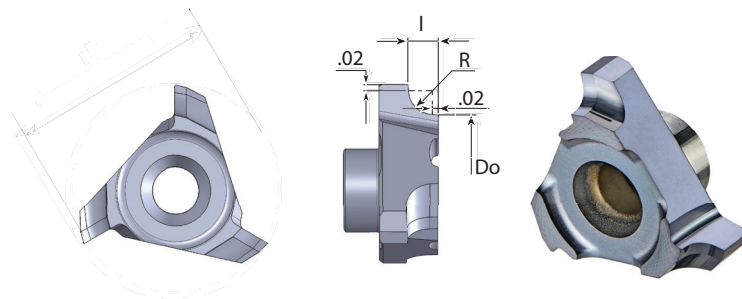

Insert Type	Ordering Code	D	Do	R	I	Holder Code*
C10	<b>C10 CR05</b>	.39	.31	.020	.04	H1, 1.1, 2, 15, 16, 17
	<b>C10 CR10</b>	.39	.27	.039	.06	
C18	<b>C18 CR13</b>	.70	.56	.049	.07	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
	<b>C18 CR15</b>	.70	.54	.059	.08	
	<b>C18 CR20</b>	.70	.50	.079	.10	
C25	<b>C25 CR30</b>	.98	.70	.118	.14	H10, 11, 24, 25

## Corner Rounding Multi Flute

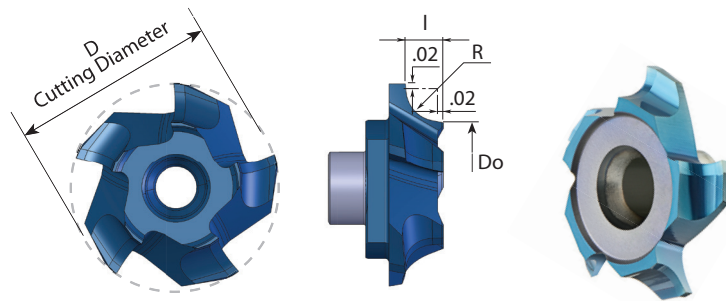


Insert Type	Ordering Code	D	Do	R	I	No. of Flutes	Holder Code*
S17	<b>S170 E CR10</b>	.67	.55	.039	.06	5	H3, 3.1, 4, 5, 18, 19, 20
	<b>S170 E CR13</b>	.67	.53	.049	.07	5	
	<b>S170 E CR15</b>	.67	.51	.059	.08	5	

Order example: S170 E CR13 MT8

\* For complete toolholder description see pages B07-22 and 23




## Front and Back Corner Rounding

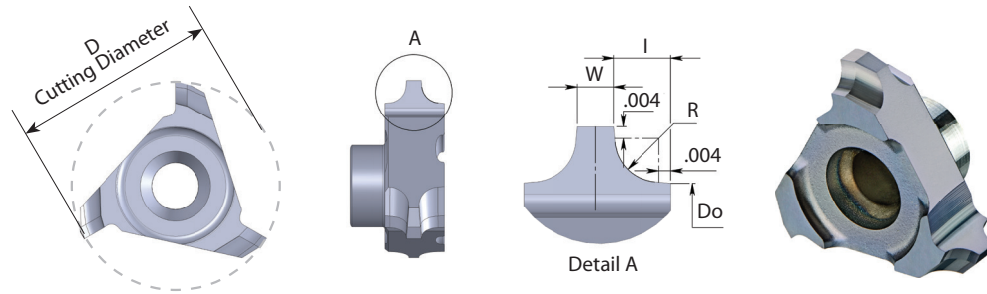

Insert Type	Ordering Code	D	Do	R	W	I	Holder Code*
C10	<b>C10 CRD08</b>	.39	.32	.031	.05	.035	H1, 1.1, 2, 15, 16, 17
C18	<b>C18 CRD15</b>	.70	.57	.059	.07	.063	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23
C25	<b>C25 CRD20</b>	.98	.81	.079	.08	.083	H10, 11, 24, 25, 31

## Front and Back Corner Rounding Multi Flute

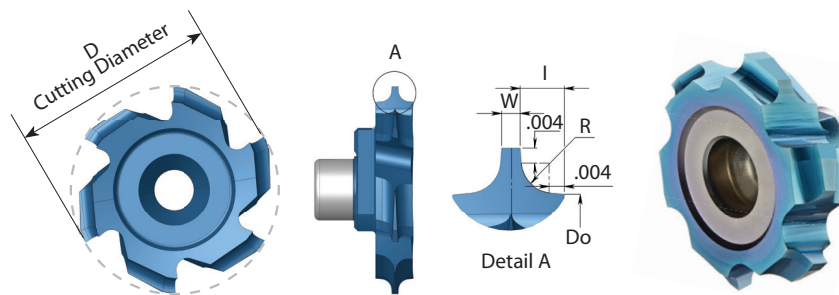


Insert Type	Ordering Code	D	Do	R	W	I	No. of Flutes	Holder Code*
S17	<b>S170 F CRD08</b>	.67	.60	.031	.05	.035	6	H3, 3.3, 4, 5, 18, 19, 20
S20	<b>S200 F CRD15</b>	.79	.66	.059	.07	.063	6	H5.1, 5.2, 6, 7, 8, 9, 20.1, 21, 22, 23

Order example: S200 F CRD15 MT8

\* For complete toolholder description see pages B07-22 and 23

## Steel Toolholders

With internal coolant

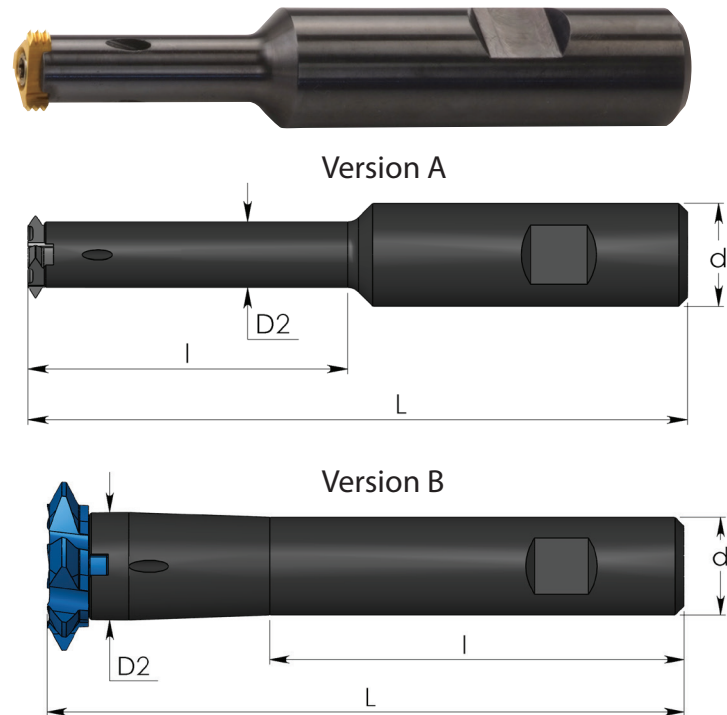


Tool No.	Ordering Code	Insert Type	d	D2	l	L	Insert Screw	Torx Key	Version
H1	<b>SRC 0500 E10</b>	C10	1/2	.29	.74	2.8	S5	K5	A
H1.1	<b>SRC 0500 F10</b>		1/2	.31	.98	3.1	S5	K5	A
H2	<b>SRC 0625 G10</b>		5/8	.29	.74	3.5	S5	K5	A
H3	<b>SRC 0500 E12</b>	C12, S17	1/2	.35	.98	2.8	S10	K10	A
H3.1	<b>SRC 0500 G12</b>		1/2	.39	1.57	3.5	S10	K10	A
H4	<b>SRC 0625 G12</b>		5/8	.35	.98	3.5	S10	K10	A
H5	<b>SRC 0625 H12</b>		5/8	.35	1.37	4.0	S10	K10	A
H5.1	<b>SRC 0625 F18</b>	C18, S20	5/8	.47	.98	3.1	S16	K16	A
H5.2	<b>SRC 0625 G18</b>		5/8	.47	1.57	3.5	S16	K16	A
H6	<b>SRC 0625 H18</b>		5/8	.54	1.90	4.0	S16	K16	A
H7	<b>SRC 0750 H18</b>		3/4	.54	1.27	4.0	S16	K16	A
H8	<b>SRC 0750 J18</b>		3/4	.54	1.90	4.5	S16	K16	A
H9	<b>SRC 0750 L18</b>	C25	3/4	.54	2.92	5.5	S16	K16	A
H10	<b>SRC 1000 J25</b>		1	.69	1.91	4.5	S27	K27	A
H11	<b>SRC 1000 M25</b>		1	.69	3.28	5.9	S27	K27	A
H12	<b>SRC 0750 P35</b>	S35	3/4	.87	4.41	6.7	S33	K33	B
H13	<b>SRC 1000 H35</b>		1	.87	1.55	3.9	S33	K33	A
H14	<b>SRC 1000 K35</b>		1	.87	2.34	5.1	S33	K33	A

Order example: SRC 0625 H18

# CMT Vertical Milling

## Carbide Shank Toolholders

With internal coolant

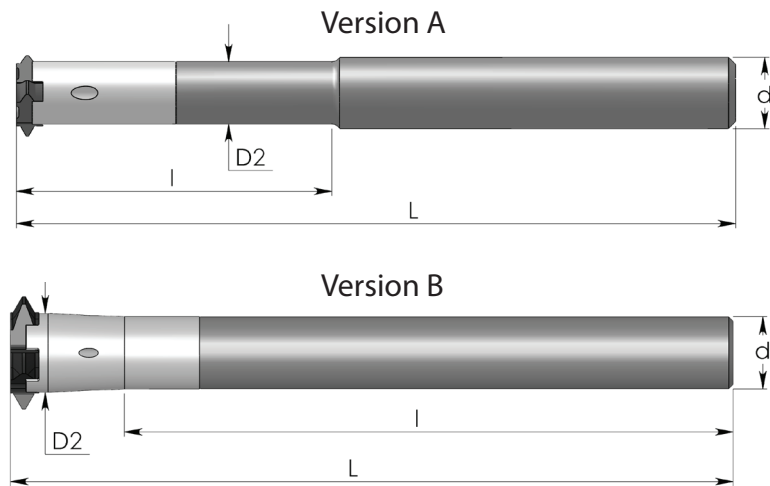

Tool No.	Ordering Code	Insert Type	d	D2	l	L	Insert Screw	Torx Key	Version
H15	<b>CRC 0312 L13 K10</b>	C10	5/16	.29	1.37	5.0	S5	K5	A
H16	<b>CRC 0312 K10</b>		5/16	.312	---	5.0	S5	K5	A
H17	<b>CRC 0375 L17 M10</b>		3/8	.29	1.77	5.9	S5	K5	A
H18	<b>CRC 0375 L15 M12</b>	C12, S17	3/8	.35	1.65	6.0	S10	K10	A
H19	<b>CRC 0375 M12</b>		3/8	.375	---	6.0	S10	K10	A
H20	<b>CRC 0500 L22 P12</b>		1/2	.35	2.28	6.8	S10	K10	A
H20.1	<b>CRC 0500 L22 P18</b>	C18, S20	1/2	.47	2.28	7.0	S10	K16	A
H21	<b>CRC 0500 P18</b>		1/2	.500	---	7.0	S16	K16	A
H22	<b>CRC 0625 L18 R18</b>		5/8	.54	1.90	7.8	S16	K16	A
H23	<b>CRC 0625 L29 R18</b>	C25	5/8	.54	2.92	7.8	S16	K16	A
H24	<b>CRC 0625 R25</b>		5/8	.69	7.11	8.2	S27	K27	B
H25	<b>CRC 0750 L33 S25</b>		3/4	.69	3.36	10.0	S27	K27	A
H26	<b>CRC 0750 S35</b>	S35	3/4	.87	8.84	10.4	S33	K33	B

Order example: CRC 0625 L18 R18

Toolholders without Weldon

## Modular Holders


Carmex presents a new CMT modular tooling system **SRCM**, provides efficiency and flexibility.

The modular system enables you to assemble an optimized tools per application, and eliminates the need for specials.


### Features and Benefits:

- High stability and accuracy.
- A rigid tool assembly allows to increase cutting depth without losing stability.
- Substantial reduction of tool inventory.
- Can be used with the standard CMT inserts C25/S35.
- With internal coolant supply.
- Each modular CMT tool can be used with large range of Carmex extensions, also compatible with common steel or carbide extensions available in the market.

## Product Identification - Ordering Codes

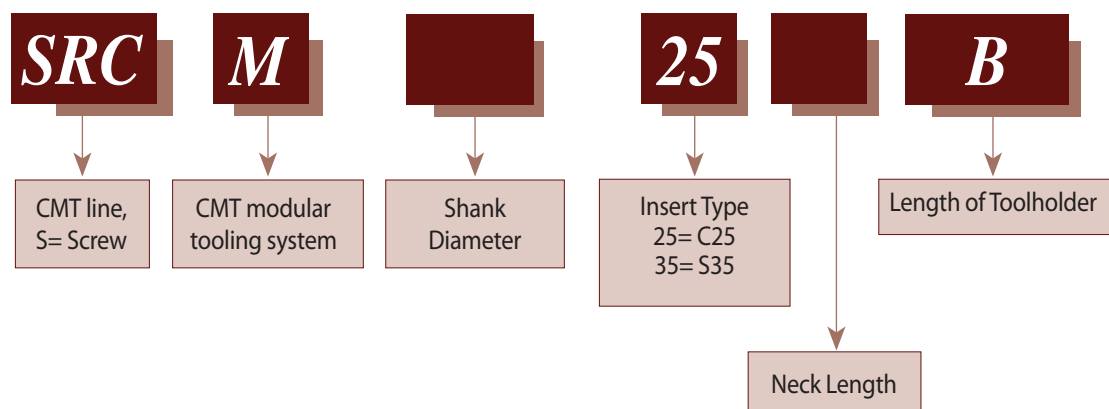

# CMT Vertical Milling

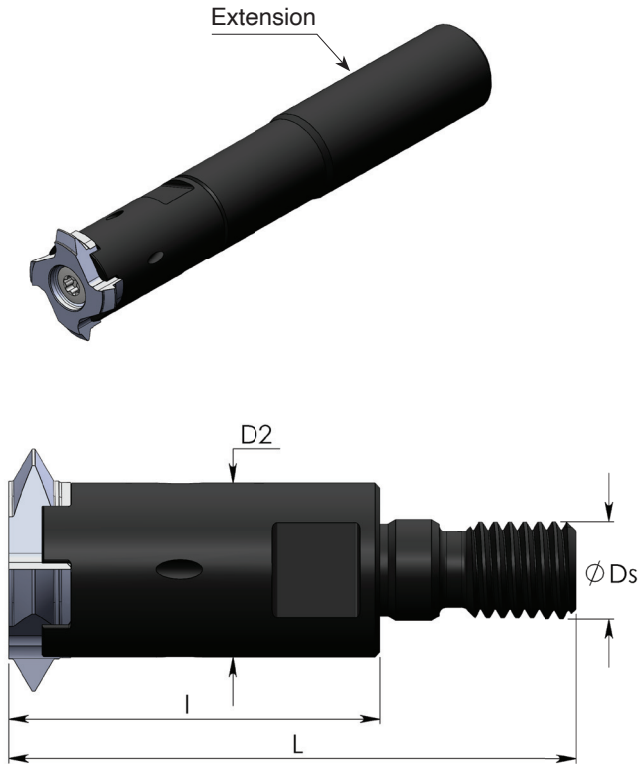


Tool No.	Ordering Code	Insert Type	D2	Ds	I	L	Insert Screw	Torx Key
H31	<b>SRCM 25 B</b>	C25	.71	M10x1.5	1.50	2.3	S27	K27
H32	<b>SRCM 35 C</b>	S35	.66	M12x1.75	1.97	2.8	S33	K33

For Carmex Extensions, see page B06-4

## CMT Multi Insert Milling Cutters


**CMT indexable milling inserts and cutters for Grooving, Chamfering and Threading**

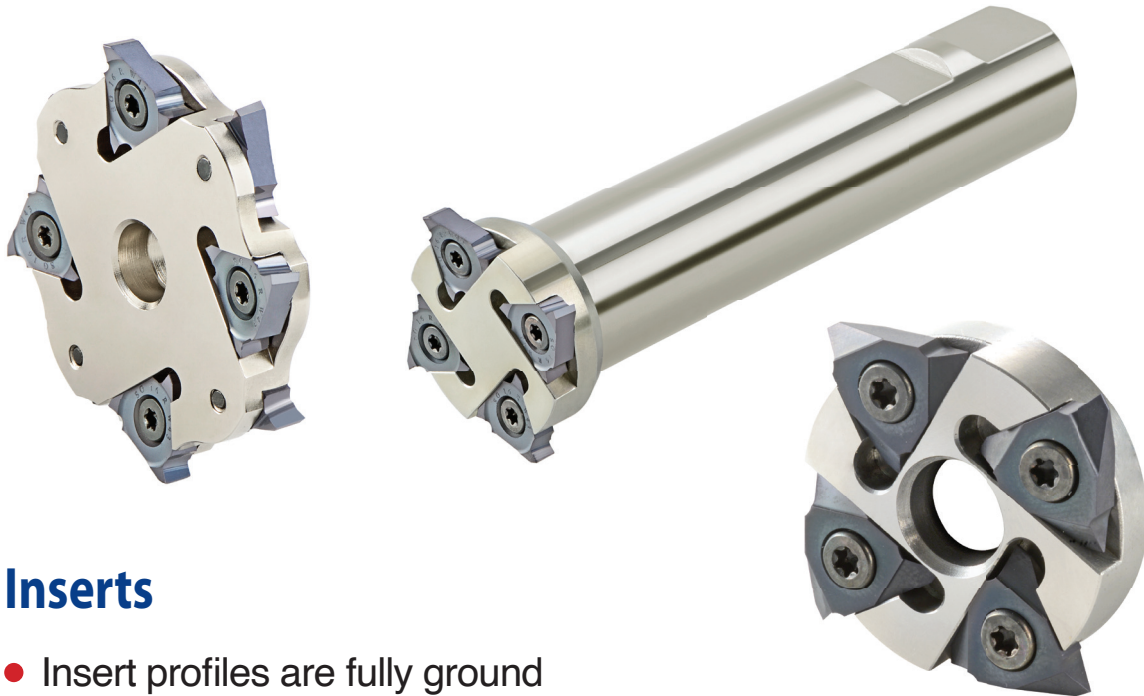

### Inserts

- Insert profiles are fully ground
- Spiral inserts for smooth cutting operation
- Three cutting edges on each insert
- For a wide range of materials and applications

Carbide grade: MT7

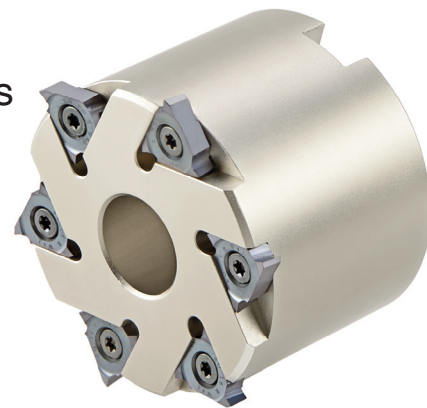

### Milling cutters / Disc milling cutter

- 4 - 8 inserts per holder, for high productivity
- For use with Carmex standard CMT S35 toolholders
- The milling cutters are coated with a special layer (silver color) for high anti-corrosive resistance and extra protection against cutting burrs




Demonstration

**B07-26**




## Product Identification - Ordering Codes


### Inserts

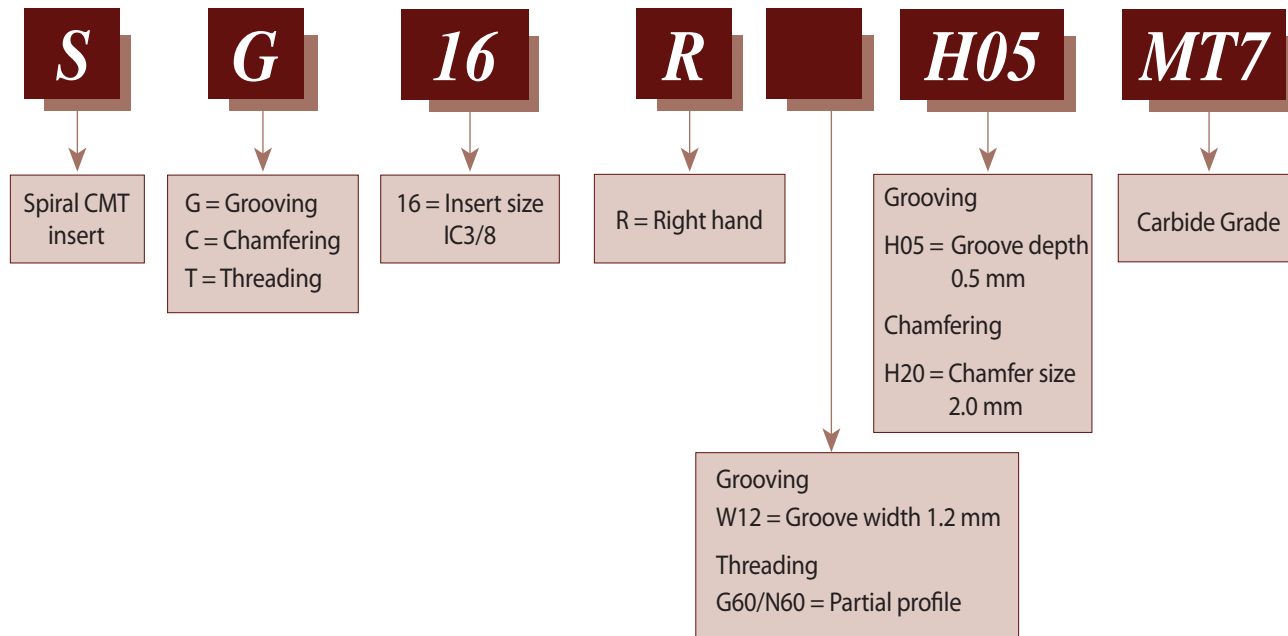

### Toolholders

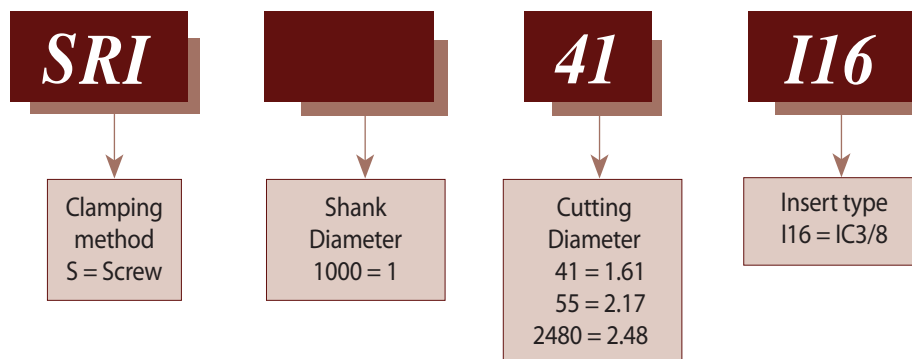

## Groove Milling

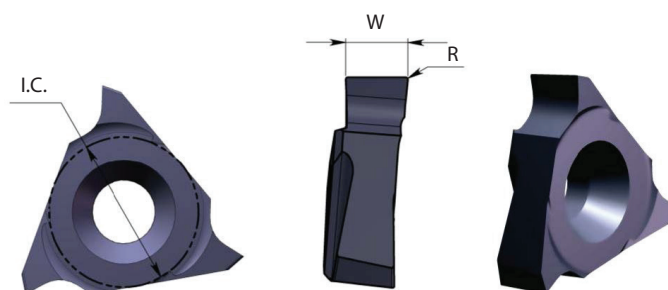

## DIN 471 / 472

Insert Type	I.C.	Ordering Code	W	R	Holder Code*
SI16	3/8	<b>SG 16 R W14</b>	.055	.004	H27, 28, 29
		<b>SG 16 R W17</b>	.067	.004	
		<b>SG 16 R W19</b>	.077	.006	
		<b>SG 16 R W22</b>	.089	.006	
		<b>SG 16 R W27</b>	.108	.008	
		<b>SG 16 R W32</b>	.128	.008	
		<b>SG 16 R W42</b>	.167	.008	H27, 29, 30
		<b>SG 16 R W43</b>	.171	.008	

Right hand cutting

Insert Type	I.C.	Ordering Code	W	R	Holder Code*
SI16	3/8	<b>SG 16 L W43</b>	.171	.008	H30

Left hand cutting


\*Maximum groove depth (T max) according to the toolholder.

\* For complete toolholder description see pages B07-29 and 30

**B07-28**

# CMT Vertical Milling

## Groove Milling with Chamfer

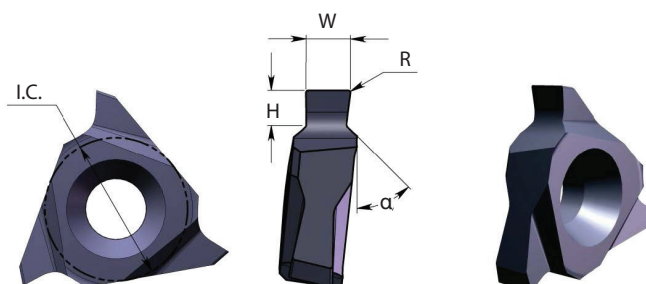


### DIN 471 / 472

Insert Type	I.C.	Ordering Code	W	H max	R	$\alpha$	Holder Code*
SI16	3/8	<b>SG 16 R W12 H05</b>	.047	.020	.004	45°	H27, 28, 29
		<b>SG 16 R W14 H07</b>	.055	.028			
		<b>SG 16 R W14 H08</b>	.055	.033			
		<b>SG 16 R W17 H08</b>	.067	.033			
		<b>SG 16 R W17 H10</b>	.067	.039			
		<b>SG 16 R W19 H12</b>	.077	.049			
		<b>SG 16 R W22 H15</b>	.089	.059	.006	45°	
		<b>SG 16 R W27 H15</b>	.108	.059			
		<b>SG 16 R W27 H17</b>	.108	.069			
		<b>SG 16 R W32 H17</b>	.128	.069			
		<b>SG 16 R W42 H20</b>	.167	.079			
		<b>SG 16 R W42 H25</b>	.167	.098			

Right hand cutting

## Chamfering

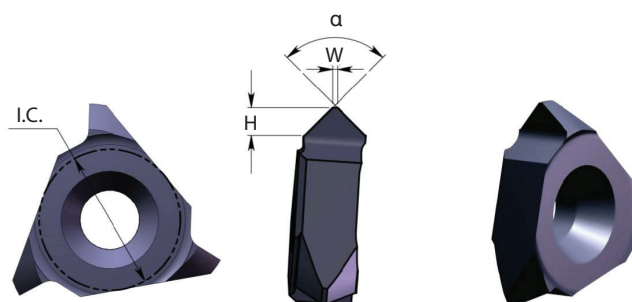


Insert Type	I.C.	Ordering Code	H max	W	$\alpha$	Holder Code*
SI16	3/8	<b>SC 16 R H20</b>	.079	.008	90°	H27, 28, 29
		<b>SC 16 R H19</b>	.075	.020	90°	

Right hand cutting

\* For complete toolholder description see pages B07-29 and 30

## Partial Profile 60° - ISO, UN

Same insert for internal and external thread

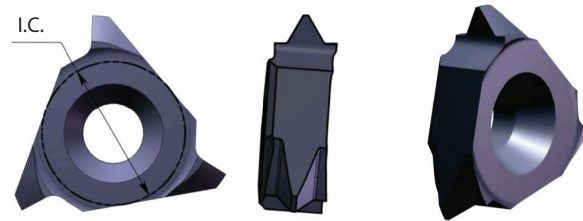

Insert Type	I.C.	Ordering Code	Pitch Range mm	Pitch Range TPI	Holder Code*
SI16	3/8	<b>ST 16 R G60</b>	Int. 1.5 -3.0	Int. 16-8	H27, 28, 29
			Ex. 1.25-3.0	Ex. 20-8	
		<b>ST 16 R N60</b>	Int. 3.5 -5.0	Int. 7-5	
			Ex. 3.0 -4.5	Ex. 8-6	

Right hand cutting




\* For complete toolholder description see pages B07-29 and 30

**B07-30**

## Toolholders

### Milling Cutter - Arbor

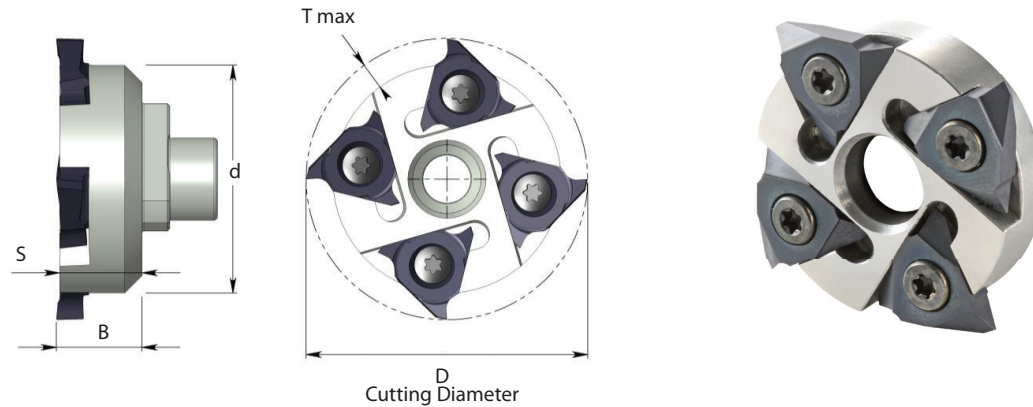


Tool No.	Ordering Code	Insert Type	D	d	T max	B	S	Insert Screw	Torx Key
H27	<b>SRI 41-116</b>	SI16	1.61	1.31	.14	.49	.47	S16S	K16

Right hand cutting

To connect to the standard CMT toolholders S35: SRC 2035 K, SRC 2535 H, SRC 2535 K, CRC 2035 S




### Milling Cutter - Shell Mill

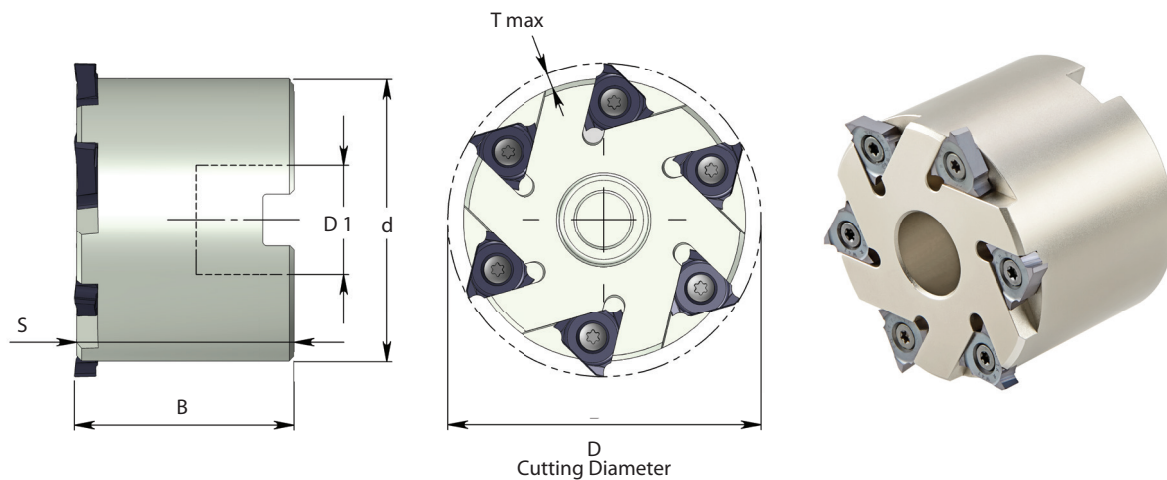

Tool No.	Ordering Code	Insert Type	D	d	T max	B	S	D1	Insert Screw	Torx Key
H28	<b>SRI 2480-116</b>	SI16	2.48	2.24	.12	1.75	1.73	1.00	S16S	K16

Right hand cutting


## Milling Cutter - Weldon Shank

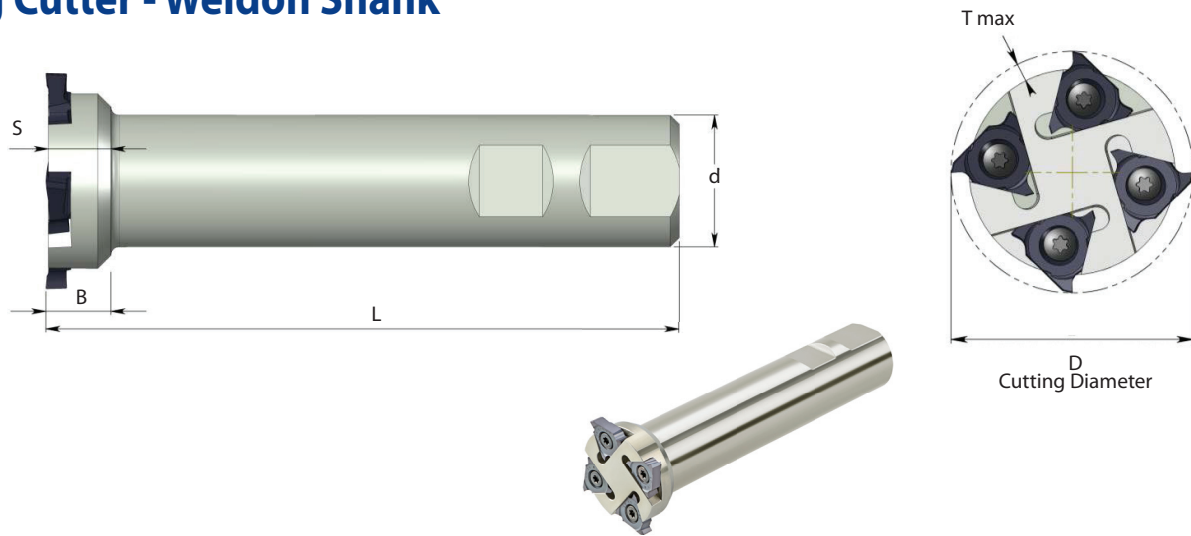

Tool No.	Ordering Code	Insert Type	D	d	T max	B	S	L	Insert Screw	Torx Key
H29	<b>SRI 1000-I16</b>	SI16	1.61	1.00	.14	.49	.47	4.9	S16S	K16

Right hand cutting

## Milling Cutter - Disc Milling

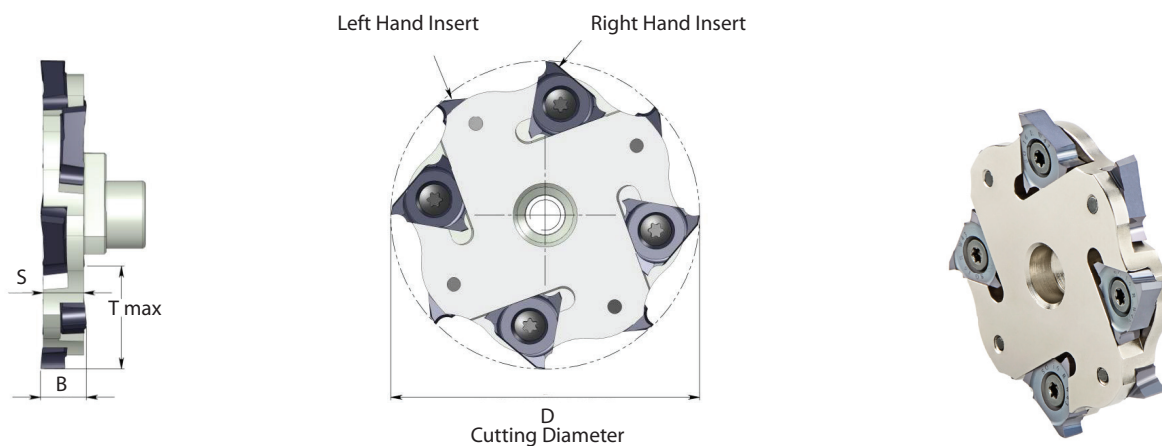

Tool No.	Ordering Code	Insert Type	D	T max	B	S	Insert Screw	Torx Key
H30	<b>SRI 55-I16</b>	SI16	2.17	.61	.32	.28	S16M	K16

Right hand cutting

To use only with inserts SG 16 R W43, and SG 16 L W43

To connect to the standard CMT toolholders S35: SRC 0750 P35, SRC 1000 H35, SRC 1000 K35, CRC 0750 S35.